

Pacific LED Vanity PCV Series

Features

Contemporary style vanity with satin nickel endcaps and smooth white diffuser provide a simple and clean appearance. Fixture can be mounted horizontally or vertically to a standard junction box (not included).

Construction

The wiring channel is formed from 22-gauge steel and is provided with standard mounting holes and wiring access.

Finish

Housing is finished in lighting grade baked gloss white enamel paint. Satin nickel endcaps.

Diffuser

Diffuser assembly consists of metal endcaps with a plated satin nickel finish. Diffuser is .07" thick smooth white acrylic. Diffuser ends attach with thumb screws.

Electrical

Input 120VAC / 60Hz Not compatible with dimmers.

LED

Integrated LED (DOB) modules capable of producing: 24" - 18W = 1700 Source lumens 36" - 27W = 2500 Source lumens 48" - 36W = 3400 Source lumens 3000K (CCT), 80 CRI.
Rated for 50,000 hrs. LED life.


Certification

All fixtures are cETLus listed for damp locations. ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.


Specifications and dimensions subject to change without notice.

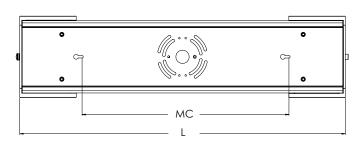

LOCATION

COMMENTS

CATALOG NUMBER



DATE

QUANTITY

FIXTURE TYPE

Ordering Information:

Satin Nickel	LED	Lumens	ССТ	L	Н	D	MC
PCV241700L30SN	18W	1700	3000K	24"	6"	3-1/8"	15-5/16"
PCV362500L30SN	27W	2500	3000K	36"	6"	3-1/8"	26-3/4"
PCV483400L30SN	36W	3400	3000K	48"	6"	3-1/8"	38-3/4"